



VERTICAL MULTI-DECK



**BRIONI**


**OSCARTEILLE**  
*Cool display*

## Brioni

	Lunghezza totale Length Longueur Breite Largo Общая длина	Lunghezza senza spalle Length without ends Longueur sans joues Länge ohne Seiten Largo sin Laterales Длина без выступов	Superficie d'esposizione frontale Opening display surface Surface d'exposition frontale Sichtbare Ausstellfläche Superficie de exposición frontal Лицевая площадь экспозиции	Superficie d'esposizione orizzontale Horizontal display surface Surface d'exposition horizontale Gesamte Ausstellfläche Superficie de exposición de apoyo Горизонтальная площадь экспозиции	Capacità utile Net volume Capacité utile Nutzleistung Capacidad útil Полезный Объем	Temperatura d'esercizio Working temperature Temp. de fonctionnement Betriebstemperatur Temp. de ejercicio Рабочая температура
	mm	mm	m <sup>2</sup>	m <sup>2</sup>	dm <sup>3</sup>	°C
135 MP H200	1330	1250	1,89	2,92	583	+2°C/+4°C
200 MP H200	1955	1875	2,83	4,38	875	
260 MP H200	2580	2500	3,78	5,84	1166	
135 MP H216	1330	1250	2,06			
200 MP H216	1955	1875	3,09			
260 MP H216	2580	2500	4,13			
375 MP H216*	3830	3750	6,19			

Classe climatica ambientale - Environmental climatic class - Classe climatique - Raumklimaklasse - Clase climática ambiental - Климатический класс оборудования: 3 +25 °C 60% U.R. - EN-ISO 23953 - 1/2

\* Disponibile solo nella versione Gruppo Esterno - Available only in version with remote compressor - Disponible uniquement dans la version Groupe Extérieur - Nur in er Ausführung mit externem Aggregat vorhanden.  
Disponible sólo en la versión con Grupo Externo - Поставляется только в исполнении с вынесенным конденсатором.

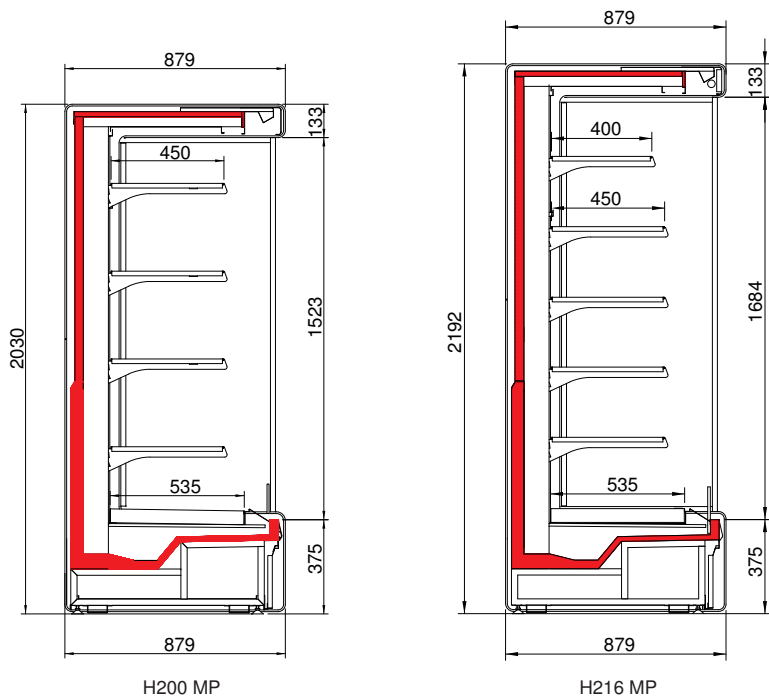

### Gamma colori - Available colour range



RAL 1023



RAL 2004



RAL 3020



RAL 5019



RAL 6018



RAL 9016

